


Hot water high-pressure cleaner



Maxima LP

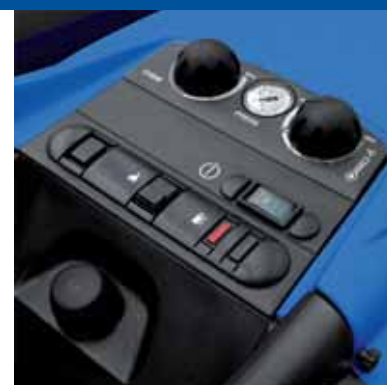

Maxima LP

- 4 poles electrical motor (1450 RPM) and thermal protection and water cooling
- Three ceramic pistons, brass linear pump head with built-in by-pass valve.
- Suction and delivery S/S valves.
- AUTOMATIC STOP System late shut down protection 24V
- Vertical burner with high thermal efficiency
- Header tank with antiscaling tank
- Adjustable detergent delivery with built-in tank for direct suction (high-pressure delivery).
- Auxiliary motor for burner air-cooling and two ways fuel pump
- Glycerine pressure gauge
- Power cable (m 5)
- Temperature regulation gauge
- Gun with swivel hose fitting
- Low voltage control switches
- Tough steel main frame

Standard equipment:

- High pressure gun with quick swivel coupling
- High pressure hose 20 mt
- High pressure lance
- Inlet brass quick fitting
- High pressure nozzle
- Outlet-hose quick fitting

Optional:

- Hose-reel with brake cod. 6.608.0010
- Antiscaling LC-PRECAL (pcs. 4 x 5 lt.) cod. 3.697.0044



Technical data:	Maxima 1515 LP	Maxima 2015 LP
Code	8.622.0703	8.622.0704
Operat. pressure bar	30 ÷ 150	30 ÷ 200
Operat. pressure psi	435 ÷ 2175	435 ÷ 2900
l/h	450 ÷ 900	450 ÷ 900
max water temperature	140° C	140° C
Abs. power kW	5,5	7,3
RPM	1450	1450
Voltage	400V~50 Hz	400V~50 Hz



Optional Hose-reel with brake